



K R I S H N A

RUBBER INDUSTRIES

SPECIALIZED MANUFACTURER AND SUPPLIER OF
INDUSTRIAL RUBBER HOSES



SHAILESH MODI
COMPANY OWNER



M : +91 9825206436
L : +91 0278 2562154



info@krishnarubber.com
sales@krishnarubber.com





www.krishnarubber.com



FACTORY
Shed No. C-/, G.I.D.C Estate
Chitra, Bhavnagar- 364004
Gujarat, India



PRODUCT RANGE

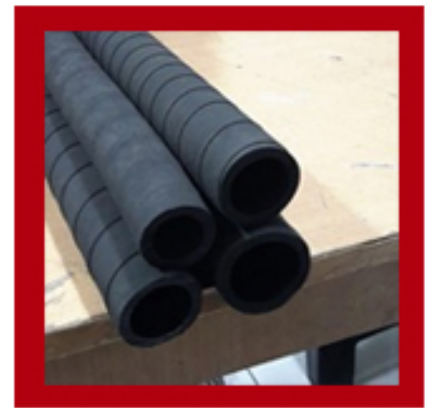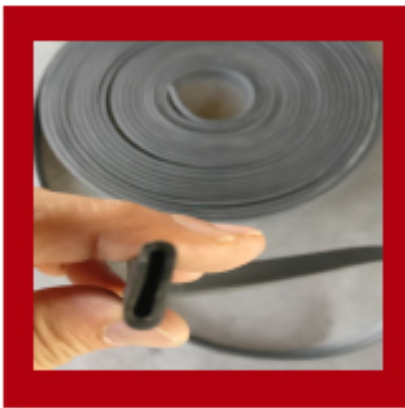


KRISHNA RUBBER INDUSTRIES

www.krishnarubber.com

OUR PRODUCT – AIR SHAFT EXPANDABLE RUBBER TUBE



AVAILABLE SIZE RANGE : 4MM – 200 MM
(CUSTOM SIZE ALSO AVAILABLE)

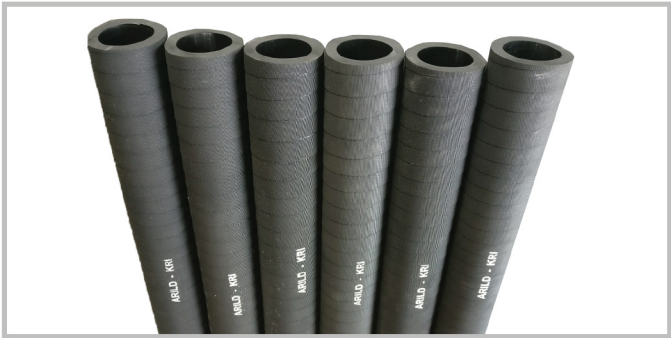

INCREASE LIFE OF AIR SHAFTS ,
REDUCING COST OF MAINTENANCE



WEAR RESISTANT WITH 2 YEARS OF SHELF



PROPERTIES OF RUBBER HOSE

Application:	Used in Air Shaft Inner Tube
Tube Material:	High Elongation Synthetic Rubber
Colour:	Black
Working Temperature:	-20 C to 180 C
Surface:	Wrapped Design
Shore A Hardness:	-60 C to 65 C
Tensile Strength:	100 kg/cm2
Elongation at Break:	300 %

APPLICATIONS

WE SUPPLY OUR PRODUCT TO AIR SHAFT MANUFACTURERS WORLDWIDE SINCE 10 YEARS.



Winding/Unwinding
Machines



Slitter
Machines



Packaging
Industries



Paper Products
Industries



Printing
Industries



Plastic
Industries



Non Woven
Fabrics



KRISHNA
RUBBER INDUSTRIES

OUR PRODUCT – CNG/LPG Gas Kit Rubber Hose




ACCURATE SIZE AND SHAPE
WITH QUALITY TESTING



HEAT AND ABRASION RESISTANCE

HIGH QUALITY RUBBER

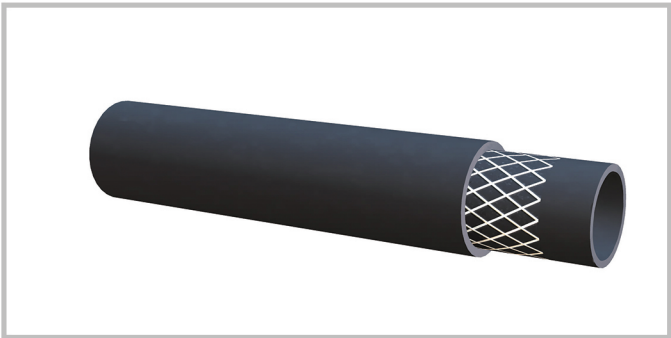

LONG DURABILITY WITH POLYESTER
YARN BRAIDING REINFORCEMENT



STANDARD SIZE

ID (INNER DIAMETER) X OD (OUTER DIAMETER)

ID 3.5 mm x OD 7.5 mm	ID 10 mm x OD 17 mm
ID 4 mm x OD 8 mm	ID 11 mm x OD 18 mm
ID 5 mm x OD 11 mm	ID 12.5 mm x OD 20 mm
ID 5.4 mm x OD 11.4 mm	ID 15 mm x OD 23 mm
ID 6 mm x OD 12 mm	ID 16 mm x OD 24 mm
ID 7.5 mm x OD 14.5 mm	ID 19 mm x OD 27 mm

PRODUCT DESCRIPTION

OUR LPG /CNG GAS KIT HOSES ARE PROVIDED BY US IN THE MARKET USED AS: VACUUM PIPE COOLANT PIPE PETROL PIPE INJECTOR PIPE GAS PIPE LPG AND CNG RUBBER HOSE ARE AVAILABLE IN 20 METER LENGTH.


PROPERTIES

SPECIFICATIONS	DETAILS
Colour	Black
Outer Cover	Hypalon Rubber
Hose Reinforcement	High Tensile Polyester Yarn Braiding
Inner Tube	PVC - Nitrile Rubber
Working Temp.	-25°C to +125°C

APPLICATION

GAS HOSE TO USE WITH LPG (PROPANE, BUTANE) AND CNG (METHANE) IN AUTOGAS CONVERTED VEHICLES.

OUR PRODUCT – Automobile Rubber Fuel Hose

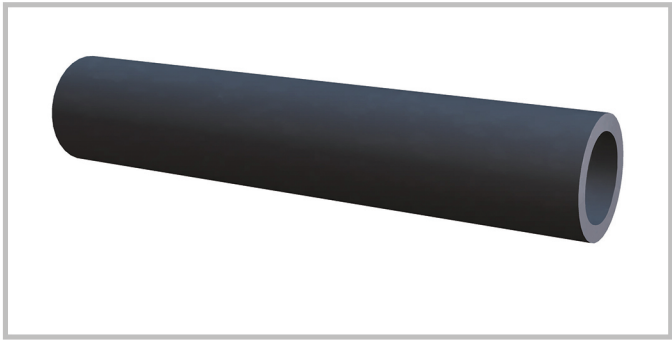

LEAKAGE PROOF



OZONE RESISTANT



AVAILABLE IN : RED, GREY, GREEN AND BLACK COLOUR

STANDARD SIZE

ID (INNER DIAMETER) X OD (OUTER DIAMETER)

ID Range	OD Range
3.5mm - 20 mm	7mm - 28mm

PRODUCT DESCRIPTION

OUR RUBBER FUEL HOSE IS MADE FROM PVC – NITRILE RUBBER INNER LINER AND HYPALON RUBBER OUTER LAYER AND MEET ALL AUTOMOBILE SPECIFICATIONS.

PROPERTIES

SPECIFICATIONS	DETAILS
Colour	Black, Grey , Red, Green
Outer Tube Material	Hypalon Rubber
Inner Tube Material	PVC – Nitrile Rubber
Temperature Range	-40°C to +100°C
Working Pressure	50-85 psi
Surface	Smooth

APPLICATION

TRANSFERRING OF DIESEL & PETROL IN VEHICLES, ENGINES & MACHINES

OUR PRODUCT – Fire Extinguisher Hose Pipe



HIGHLY DURABLE AND LEAKAGE PROOF

STANDARD SIZE

ID (INNER DIAMETER) X OD (OUTER DIAMETER)

ID	OD
12.5 mm	20.5 mm

PRODUCT DESCRIPTION

THE ENTIRE RANGE IS MADE USING HIGH-GRADE MATERIAL AND ADVANCED MACHINERY IN COMPLIANCE WITH THE INDUSTRY STANDARDS. THESE ARE HIGHLY RELIABLE AND WELL TESTED ON SEVERAL QUALITY PARAMETERS TO PERFORM BETTER.

PROPERTIES

SPECIFICATIONS	DETAILS
Tube Material	EPDM Rubber Hose Pipe
Colour	Black
Surface	Smooth
Reinforcement	High Tensile Polyester Yarn
Operating Temperature	-20 C to +100 C
Working Pressure	20kgf/cm2
Tube Material	Synthetic Rubber

APPLICATION

FIRE EXTINGUISHER HOSE